




Anwendung/Application :




Operating System (OS):

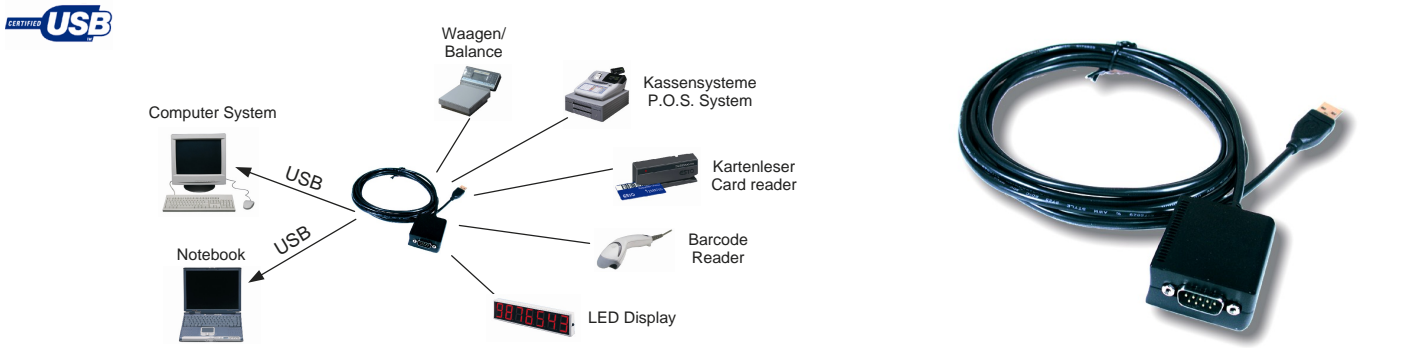



Geprüft/Approved:



Verpackung/Packing:



 USB 1.1 zu 1S Seriell RS-232 Port (FTDI Chip-Set)	
Beschreibung :	<ul style="list-style-type: none"> Das USB 1.1 zu RS-232 Kabel stellt eine Serielle RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Seriellen Ausgang für PC, kleine Workstation oder Server über den USB 1.1 oder 2.0 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und die EX-1301-2 kann bei laufendem Betrieb installiert werden.
Merkmale :	<ul style="list-style-type: none"> Schnittstelle: RS-232 V.24 FIFO Buffer: 16C550 mit 16Byte I/O Adressen: wird vom Betriebs System vergeben Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing Daten Bits: 5, 6, 7, 8 Stop Bits: 1, 1.5, 2 Parity: none, even, odd, space, mark Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	<ul style="list-style-type: none"> FTDI
Datentransfer-Rate :	<ul style="list-style-type: none"> 50 Baud bis 115.2KBaud
Anschlüsse :	<ul style="list-style-type: none"> 1 x A-Stecker Upstream 1 x 9 Pin D-SUB Seriell Stecker
Arbeitstemperatur :	<ul style="list-style-type: none"> 0 bis 55°C
Luftfeuchtigkeit :	<ul style="list-style-type: none"> 5 bis 95%
Hardwaresysteme :	<ul style="list-style-type: none"> USB 1.1 oder 2.0
Abmessung / Gewicht :	<ul style="list-style-type: none"> Kabellänge 1.8 Meter / 150g
Lieferumfang :	<ul style="list-style-type: none"> EX-1301-2, Treiber CD, Handbuch

 USB 1.1 to 1S Serial RS-232 Port (FTDI Chip-Set)	
Description:	<ul style="list-style-type: none"> The USB 1.1 to RS-232 cable provides one high performance 16C550-type UART compatible RS-232 serial port. It is designed for PC, thin client or server to provide instant COM port expansion via the USB 1.1 or 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1301-2 when the system run.
Feature :	<ul style="list-style-type: none"> Interface: RS-232 V.24 FIFO Buffer: 16C550 with 16Byte I/O addresses: Setting from the operating system Interrupt: Setting from the System BIOS with Interrupt Sharing Data Bits: 5, 6, 7, 8 Stop Bits: 1, 1.5, 2 Parity: None, even, odd, space, mark Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	<ul style="list-style-type: none"> FTDI
Data transfer rate :	<ul style="list-style-type: none"> 50 Baud up to 115.2KBaud
Connectors :	<ul style="list-style-type: none"> 1 x A-male Upstream connector 1 x 9 pin D-SUB serial male connector
Operating Temperature :	<ul style="list-style-type: none"> 0 up to 55°C
Operating Humidity :	<ul style="list-style-type: none"> 5 up to 95%
Hardware system :	<ul style="list-style-type: none"> USB 1.1 or 2.0
Size / Weight :	<ul style="list-style-type: none"> Cable length 1.8 meter / 150g
Packaging contents :	<ul style="list-style-type: none"> EX-1301-2, Driver CD, Manual